

# SCENA LED 200 CT



The super-bright  
LED Projector  
with selectable  
color temperature

LINEARLY TUNABLE WHITE COLOR  
TEMPERATURE (2700K – 6500K)

FLICKER FREE PROJECTION

HIGH-EFFICIENCY 6.5° - 70° LINEAR ZOOM  
CRI > 90

LONG LIFE LED (50,000 HOURS)

NOISELESS OPERATION

DMX / RDM AND MANUAL CONTROL

LOW POWER CONSUMPTION



SCENA LED 200 CT is a high power, compact, lightweight LED projector suitable for TV studios, theatres, museums, exhibitions, events. The unit LED's white color temperature is linearly tunable from 2700K to 6500K; a must in the most demanding applications, where a perfectly adjustable white color temperature is a key requirement. SCENA LED 200 CT offers technical features that dramatically improve light quality and flexibility of use: CRI>90, flicker-free projection, DMX/RDM or manual control, noiseless operation, virtually zero maintenance costs, lower power consumption.



# SCENA LED 200 CT



## OUTPUT

Single high-power white LED with linearly tunable color temperature (2700K – 6500K)  
CRI>90  
LED lifespan: 50,000 hours

## OPTICAL GROUP

Ø 150 mm Fresnel lens  
6.5° - 70° linear zoom

## INTERFACE / CONTROL / PROGRAMMING

DMX 512 / RDM  
7 DMX channels default) or 2 DMX channel  
4-digit 7-segment LED display + 4 soft keys

## POWER SUPPLY

Electronic full-range 100-240 Vac 50 / 60 Hz  
Power consumption: 200 W max

## CONNECTIONS

Power supply: PowerCON TRUE1 In / Out panel connectors;  
DMX: XLR 5-pole In / Out panel connectors

## OPERATING AMBIENT TEMPERATURE

-10° / 40°

## PHYSICAL


Weight: 8.1 Kg  
Dimensions: 276x397x357 h mm  
Strong housing with folded edges

## INTERNATIONAL CERTIFICATIONS

CE certification

## INCLUDED ITEMS

1 x PowerCON TRUE1 female cable connector (code 0520P066)  
1 x XLR 5 pins female cable connector (code 0508B147)  
1 x XLR 5 pins male cable connector (code 0508B148)  
1 x Filterframe Black finishing - already installed on the projector (code 02M093278.46)

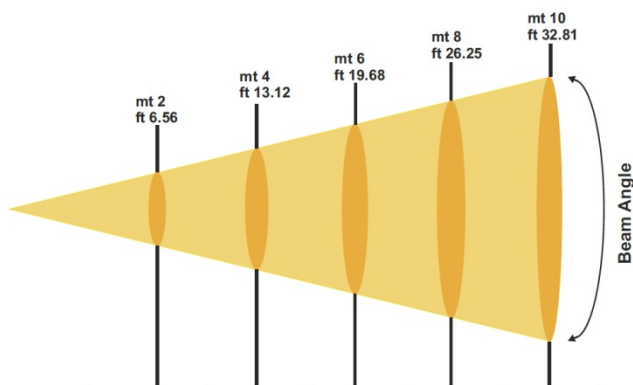

Lux center [lx]	25000	6250	2778	1563	1000
Foot candles [fc]	2323	581	258	145	93
Diameter [cm]	23	45	68	91	114
Diameter [ft]	0.75	1.49	2.24	2.98	3.73

Beam Angle 6.5° @ 50%

Lux center [lx]	1888	472	210	118	76
Foot candles [fc]	175	44	19	11	7
Diameter [cm]	280	560	840	1120	1400
Diameter [ft]	9.19	18.38	27.57	36.76	45.94

Beam Angle 70° @ 10%