



# MSR Gold™ SA Double Ended

## MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Product data

General Information		Operating and Electrical	
Cap-Base	SFC-11 [ SFC-11]	Power (Rated) (Nom)	575 W
Operating Position	UNIVERSAL [ Any or Universal (U)]	Lamp Current (Nom)	7 A
Main Application	Entertainment	Ignition Supply Voltage (Min)	198 V
Life To 50% Failures (Nom)	750 h	Controls and Dimming	
System Description	SA/2 DE	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	2	Cap-Base Information	SFC-11
Luminous Flux (Min)	39000 lm	Luminaire Design Requirements	
Luminous Flux (Nom)	42000 lm	Pinch Temperature (Max)	400 °C
Chromaticity Coordinate X (Nom)	294	Product Data	
Chromaticity Coordinate Y (Nom)	317	Full product code	872790091464100
Correlated Color Temperature (Nom)	7500 K	Order product name	MSR Gold™ 575 SA/2 DE 1CT/40
Luminous Efficacy (rated) (Nom)	73 lm/W		
Color Rendering Index (Nom)	75		

MSR Gold™ SA Double Ended


EAN/UPC - Product	8727900914641
Order code	928175105114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40

Material Nr. (12NC)	928175105114
Net Weight (Piece)	0.032 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

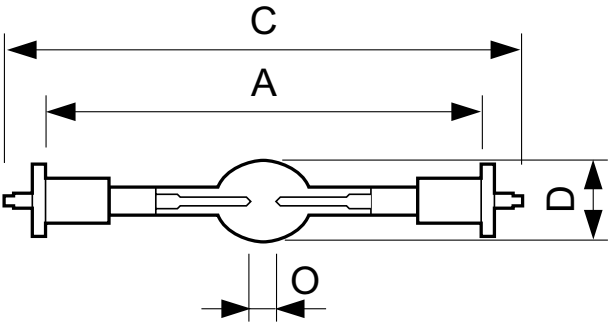


MSR GOLD 575 SA/2 DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 575 SA/2 DE 1CT/40	18.5 mm	5.0 mm	69.6 mm	70.4 mm	70 mm	92 mm

Photometric data

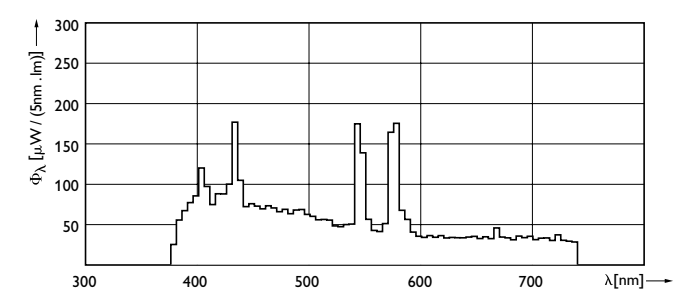

MSR Gold™ 575 SA/2 DE

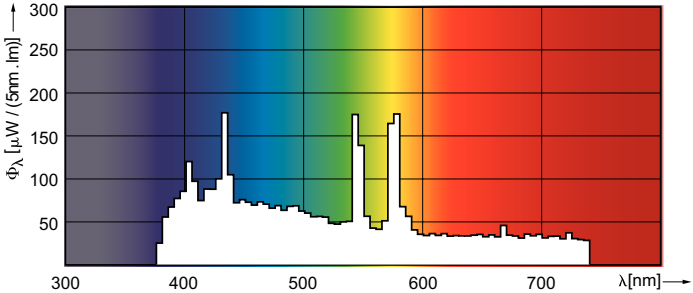

MSR Gold™ 575 SA/2 DE

