


1.50 mm² Speaker Cable with Flame Resistant Jacket

Item Code: 1E00190

CVS LK02N15

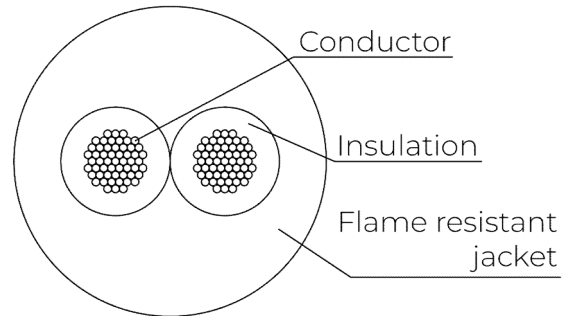

| General Data | |
|--------------------------------|-----------------------------------|
| Application | Mobile |
| Cable O.D. (mm) | 7.4 |
| Signal Type | Analog Audio |
| Standard Reels (m) | 100 |
| Reel Material | Cardboard |
| Mechanical Data | |
| Bending Radius (xO.D.) | 8 |
| Min Operating Temperature (°C) | -20 |
| Max Operating Temperature (°C) | 70 |
| Weight (Kg/100m) | 9.60 |
| Conductor | |
| Quantity | 2 |
| Material | Flexible electrolytic bare copper |
| Strands | 48 |
| Strands O.D. (mm) | 0.193 |
| Area (mm ²) | 1.5 |
| Insulation | |
| Material | PVC T12 |
| Insulation O.D. (mm) | 2.8 |
| Thickness (mm) | 0.7 |
| Jacket | |
| Color | Black |
| Material | PVC |
| Nominal Thickness (mm) | 0.9 |

| Electrical Data | |
|----------------------------|-----------------------------|
| Max Conductor DCR (ohm/km) | 13.3 |
| Mutual Capacitance (pF/m) | 110 |
| Rated Voltage (Vac) | 300 |
| Test Voltage (Vac) | 2500 |
| Standards and Compliance | |
| CE | Yes |
| Standard reference | IEC 60332-1-2 EN 50363-3 |