

Amplifier

DA8

DA8 is a 4 channels amplifier used with all APG loudspeakers ranges depending on the desired application.

DA8 includes signal processing, analog, AES3, Dante/AES67 inputs and outputs, and a bright 4.3" IPS display with capacitive touch.

The 4 channels offers high power and voltage, allowing for high SPL even with 8 or 16 Ω loads, and is capable of delivering a massive 4 x 2000 W output on 4 Ω loads.

The amplifier's power supply has been designed to operate anywhere in the world. An internal energy storage system allows the amplifier keep a consistent performance in the event of a drop in the quality of the electrical network to which the amplifier is connected.

The amplifier can be controlled with touch screen. Available functions includes preset recall, gain, delay, and muting functions.

DA8 can also be controlled remotely with ArmoniaPlus software.



DA8 Amplifier

Number of channels : 4

Output power @8Ω : 1500W per channel
Output power @4Ω : 2000W per channel
Output power @2Ω : 2500W per channel

Output power @8Ω bridged : 4000W
Output power @4Ω bridged : 5000W



Inputs : Analog, Digital (AES3, Dante/AES67)
Remote : GPI or Ethernet

5 years warranty

APG

DA8

Technical Specifications

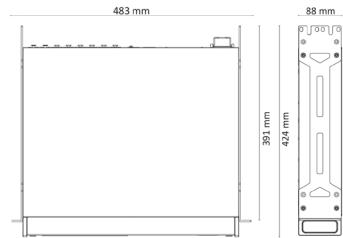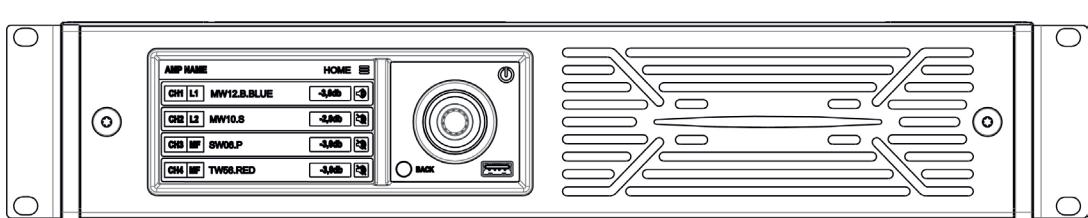

Channel Handling

Outputs	4 x Speakon NL4
	4 Dante/AES67 TX (from local input or DSP)
Inputs	
Analog	4 XLR female 4 XLR male (LINK)
Digital AES3	2 XLR female (4 x audio channels) 2 XLR male (LINK)
Digital Dante/AES67	2 XLR Ethercon (4 x audio channels)

Audio

Gain	DA8
Input sensitivity @ 8Ω	32dB
S/N (20 Hz - 20 kHz @ 8Ω)	109 Typ dB(A)
Max input level	24 dBu
Frequency response @ 8Ω load	20 Hz - 20 kHz +/- 1.0 dB
Crosstalk (1 kHz)	-75 dB typ.
Input impedance	20 kΩ Balanced
CMRR	65 dB typ.
THD+N (from 0.1W to Half Power)	<0.1% (typical <0.05%)
SMPTE IMD (from 0.1W to Half Power)	<0.1% (typical <0.05%)
Output impedance at 100 Hz	30mΩ

DSP

AD converters	24 Bit Tandem™ @ 48 kHz 125 dB-A Dynamic Range - 0.005 % THD+N
DA converters	24 Bit Tandem™ @ 48 kHz 117 dB-A Dynamic Range - 0.003 % THD+N
Sample rate converter	24 Bit @ 96 kHz 140 dB Dynamic Range - 0.0001 % THD+N
Internal precision	32 bit floating point
Latency	2.5 ms fixed latency architecture
Memory/Presets	50 amplifier snapshots, virtually unlimited speaker presets
Delay	2 s (input) + 100 ms (output) for time alignment
Equalizer	Raised-cosine, custom FIR, parametric IIR, peaking, hi/lo-shelving, all-pass, band-pass, band-stop, hi/lo-pass
Crossover	linear phase (FIR), Butterworth, Linkwitz-Riley, Bessel: 6 dB/oct to 48 dB/oct (IIR)
Limiters	TruePower™, RMS voltage, RMS current, Peak limiter
Damping control	Active DampingControl™ and LiveImpedance™ measurement

Display Specs

Resolution	480x272, 4.3" diagonal
Brightness	600 nit
Control	Multitouch capacitive, Rotary encoder 20 steps/turn with pushbutton

Output Stage

per channel @ 8Ω (symmetrical)*	1500W
per channel @ 4Ω (symmetrical)*	2000W
per channel @ 2Ω (symmetrical)*	2500W
per channel @ 8Ω (asymmetrical)**	1600W
per channel @ 4Ω (asymmetrical)**	2500W
per channel @ 2Ω (asymmetrical)**	2500W
@ 8Ω bridged	4000W
@ 4Ω bridged	5000W
Maximum unclipped output voltage	160V _{peak}
Maximum output current	>55A _{peak}

*All channels driven and loaded symmetrically
** All channels driven, but channels 2 and 4 at -6dB

Power & Thermal

	DA8
Standby	Power
Idle	Power
1/8 Power @4Ω	Power
@ 100 V	Current Draw
	14.7 A _{rms}
	Thermal Loss
	1458 BTU/h
Standby	Power
Idle	Power
1/8 Power @4Ω	Power
@ 240 V	Current Draw
	6.0 A _{rms}
	Thermal Loss
	1111 BTU/h
Power supply	Universal regulated switch mode with PFC
Nominal voltage (+/-10%)	100-240 VAC @ 50-60Hz
Operating Voltage	90-264 VAC @ 50/60 Hz
AC Mains connector	IEC C20 inlet (20 A max)

Constructions

Dimensions	483 x 381 x 88.9 mm (19 x 15 x 3.5 in)
Weight	11.3 kg