
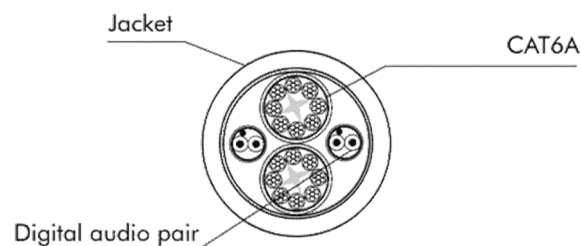


2-Core CAT6 Ethernet + 2-Pair Digital Audio Hybrid Cable

Item Code: 1E00255

CVS LK2CAT6AUF AD2

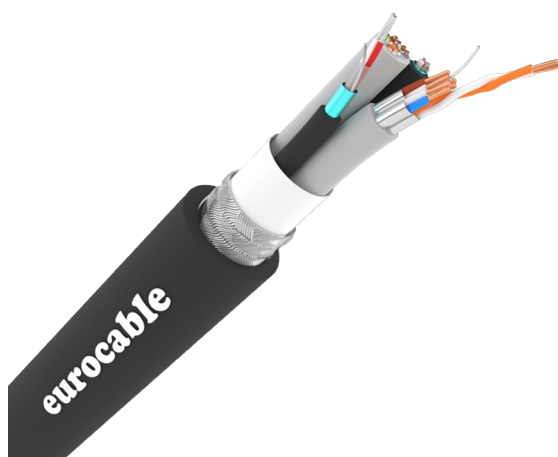

General Data	
Application	Mobile
Cable O.D. (mm)	19.3
Standard Reels (m)	305
Reel Material	Wooden
General Data - Audio	
Pairs	2
Mechanical Data	
Bending Radius (xO.D.)	10
Min Operating Temperature (°C)	-15
Max Operating Temperature (°C)	80
Weight (Kg/100m)	44.40
Conductor - Audio	
Area (mm²)	0.14
AWG	26
Material	Tinned copper
Insulation - Audio	
Material	Foam-Polyolefine
Shield - Audio	
Material	Aluminum - Polyester
Coverage	100%
Shield Type	Foil
Jacket - Audio	
Cable O.D. (mm)	4.6
Conductor - Data	
Strands	1
Strands O.D. (mm)	0.57
Material	Bare copper
Insulation - Data	
Insulation O.D. (mm)	1.25

Shield - Data	
Material	Aluminum - Polyester
Coverage	100%
Shield Type	Tape
Jacket - Data	
Cable O.D. (mm)	7.4
Shield	
Material	Tinned copper braid
Coverage	85%
Jacket	
Color	Black
Material	PVC Compound
Electrical Data	
Rated Voltage (Vac)	30
Test Voltage (Vac)	500
Electrical Data - Audio	
Max Conductor DCR (ohm/km)	150
Nominal Impedance (ohm/100m)	110
Standards and Compliance	
Standard reference	EN 50363