



## **NAHDMI-W-B**

HDMI feedthrough adapter, black D-shape housing

Neutrik's HDMI solution for the transmission of any digital TV and PC video format including high-definition video (HDTV) can be integrated in networks very easy.




## **Features & Benefits**

- ✓ To transmit any digital TV and PC video format including high-definition video (HDTV)
- ✓ HDMI feedthrough adapter with 19 pole HDMI receptacle at both ends
- ✓ IP65 ingress protection in mated condition with NKHDMI-\* and SCDP-\* sealing gasket
- Universally accepted standard D-shape housing
- Removable screen to chassis grounding



✓ Shielded system - high noise immunity and EMI protection due to continuous 360 degree shield

## Removable screen to chassis grounding

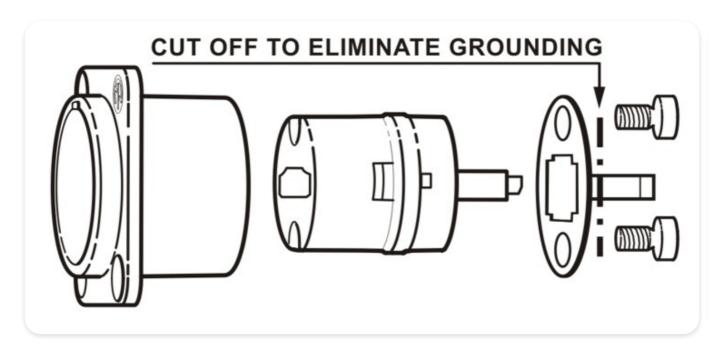

## **Technical Information**

| Product         |            |
|-----------------|------------|
| Title           | NAHDMI-W-B |
| Connection Type | Adapter    |
| Gender          | female     |

| Mechanical         |   |
|--------------------|---|
| Wiresize           |   |
| Locking device     | Push-Pull   |
| Mounting direction | Front or rear mounting (max 2 mm panel thickness) |
| Chassis shape      | D   |
| Lifetime           | > 1000 mating cycles                              |



| Material        |                         |
|-----------------|-------------------------|
| Contact plating | Au                      |
| Contacts        | Bronze (CuSn)           |
| Insert          |                         |
| Shell           | Zinc diecast (ZnAl4Cu1) |
| Shell plating   | Black chromium          |

| Environmental       |                  |
|---------------------|------------------|
| Flammability        | UL 94 V-0        |
| Standard compliance | HDMI 2.0         |
| Temperature range   | -25 °C to +85 °C |