



# MSD Platinum (Touring/Stage)

# MSD Platinum 15 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

### **Product data**

General Information		
Cap-Base	-[-]	
Operating Position	UNIVERSAL [ Any or Universal (U)]	
Main Application	Stage/Touring	
Life to 50% Failures (Nom)	2000 h	
System Description	-	
Light Technical		
Color Code	2	
Luminous Flux (Min)	11000 lm	
Luminous Flux (Nom)	13500 lm	
Chromaticity Coordinate X (Nom)	299	
Chromaticity Coordinate Y (Nom)	303	
Correlated Color Temperature (Nom)	8000 K	
Color Rendering Index (Nom)	-	

Operating and Electrical		
Power (Rated) (Nom)	300 W	
Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Cap-Base Information	-	
Luminaire Design Requirements		
Bulb Temperature (Max)	900 °C	
Pinch Temperature (Max)	350 °C	
Product Data		
Full product code	871829113535700	
Order product name	MSD Platinum 15 R 1CT/8	

Datasheet, 2017, November 20 data subject to change

# MSD Platinum (Touring/Stage)


EAN/UPC - Product	8718291135357
Order code	928191605314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8

Material Nr. (12NC)	928191605314
Net Weight (Piece)	0.100 kg

# Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

# **Dimensional drawing**







MSD Platinum 15 R

Product	D (max)	0	C (max)
MSD Platinum 15 R 1CT/8	58.5 mm	1.3 mm	66.4 mm

## Photometric data



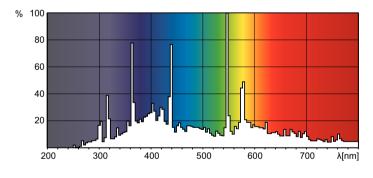

MSD



MSD