



MSD Platinum (Touring/Stage)

MSD Platinum 5 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Product data

General Information		Operating and Electrical	
Cap-Base	- [-]	Power (Rated) (Nom)	189 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Controls and Dimming	
Main Application	Stage/Touring	Dimmable	Yes
Life To 50% Failures (Nom)	3000 h	Mechanical and Housing	
System Description	Reflector-E20.6	Cap-Base Information	-
Light Technical		Luminaire Design Requirements	
Color Code	2	Pinch Temperature (Max)	350 °C
Luminous Flux (Min)	7100 lm	Product Data	
Luminous Flux (Nom)	7950 lm	Full product code	872790093070200
Chromaticity Coordinate X (Nom)	300	Order product name	MSD Platinum 5 R 1CT/8
Chromaticity Coordinate Y (Nom)	300	EAN/UPC - Product	8727900930702
Correlated Color Temperature (Nom)	8000 K		
Color Rendering Index (Nom)	-		

MSD Platinum (Touring/Stage)


Order code	928190805314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928190805314

Net Weight (Piece)	0.120 kg
--------------------	----------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSD Platinum 5 R

Product	D (max)	T (max)	O	C (max)
MSD Platinum 5 R 1CT/8	51.4 mm	6.8 mm	1.0 mm	57.1 mm

Photometric data

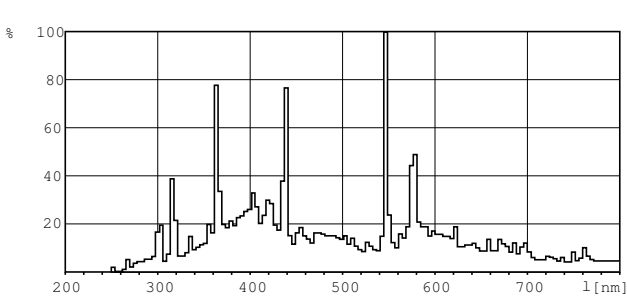

MSD

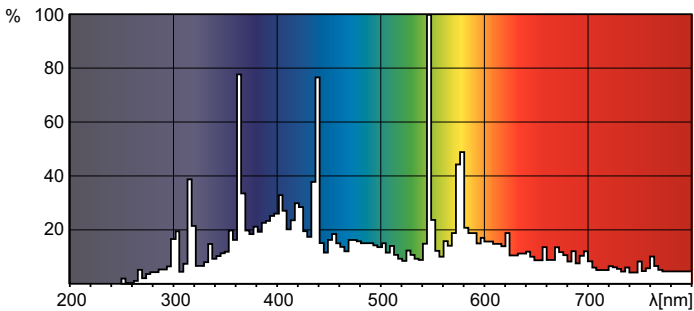

MSD

