




MINI BRICK ARC

THE ULTIMATE ULTRA-COMPACT OUTDOOR LED WASH LIGHT

The new MINI BRICK ARC is a high power, ultra-compact, **IP65 LED Wash light** created for the most demanding outdoor applications. MINI BRICK ARC features the **ACC (Anti-Corrosion Coating)** exclusive treatment, that guarantees effective protection against corrosion and makes the fixture suitable for climates with high humidity and saltiness levels, as well as for wide temperature ranges. MINI BRICK ARC is fitted with 12 Ostar Stage N RGBW LEDs, and it is available with a range of different lenses sets. The unit is powered by an external DRIVENET series PSU.

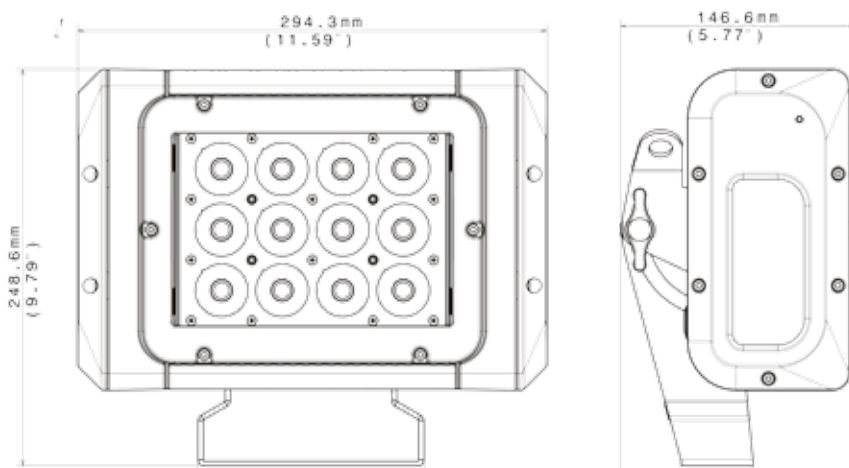

UN 8°
03.LDB121S28FC08

SP 12°
03.LDB121S28FC10

MF 28°
03.LDB121S28FC25

WF 38°
03.LDB121S28FC40

OUTPUT

- 12 OSTAR STAGE “N” Full Color (RGBW) LEDs
- LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

- 4 lenses set available:
 - Ultra-Narrow 8°
 - Narrow 12°
 - Medium 28°
 - Wide 38°
- Uniform projection on surfaces

COLOR GENERATION

- 16 million colors
- Wide palette of pure uniform Whites with variable linear color temperature (2700K - 8000K)

POWER SUPPLY

- External PSU
 - DRIVENET 28C DIN @48Vdc
 - DRIVENET 28 EZ / 416 / 832 (Full-range 100-240Vac 50-60 Hz)
 - DRIVENET 1664 POWER (Range 180-240Vac 50-60 Hz)

- Power consumption: 120 W max

CONNECTIONS

- LED IN: 0,7 m cable with M16 male IP67 connector

OPERATING TEMPERATURE

-30° / 40°C

PHYSICAL

- IP65
- IK protection degree: IK09
- Weight: 6 Kg (13.3 lbs)
- Finishing: RAL 9006 + ACC treatment

SHIPPING

- Packaging: Carton box
- Box size (LxHxD): 375 x2 65 x 355 mm (14.8"x10.3"x14")
- Weight: 7.3 Kg (16 lbs)

CONNECTIONS CHART

DRIVENET 28C DIN @ 48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 2 (1 item per output)	Max 2 (1 item per output)	Max 4 (1 item per output)	Max 8 (1 item per output)	Max 16 (1 item per output)

ACCESSORIES INCLUDED

- 1 x M12 female IP67 cable connector (code 0520P050)

ACCESSORIES ON REQUEST

- Lenses set Ultra-Narrow 8° (code 03.LK.269.44)
- Lenses set Narrow 12° (code 03.LK.270.44)
- Lenses set Medium 28° (code 03.LK.271.44)
- Lenses set Wide 38° (code 03.LK.272.44)
- Holographic filter 10° (code 0506A101.D12)
- Holographic filter 20° (code 0506A043.D12)
- Holographic filter 40° (code 0506A045.D12)
- Holographic filter 60° (code 0506A103.D12)
- Holographic filter 80° (code 0506A121.D12)
- Holographic filter 60°x10° (code 0506A092.D12)
- Holographic filter 75°x45° (code 0506A119.D12)
- Barndoor black finishing (code 03.LA.211)
- Visor RAL 9006 ACC (code 03.LA.230.28)
- G50 “C” Clamp - max load 10 Kg (code 0521A012)
- G60 “C” Clamp - max load 50 Kg (code 0521A004)
- Aliscaf clamp for tube diameter 50 mm - max load 100 Kg (code 0521A008)
- Safety cable - 0.3x60 cm - max. capacity load 60 Kg (code 0521A010)

PHOTOMETRIC DATA

LEDs current 700mA

	mt 5 ft 16.40	mt 10 ft 32.81	mt 15 ft 49.21	mt 20 ft 65.62	mt 25 ft 82.02
lux center (lx)	5627	1407	625	352	225
foot candles (fc)	523	131	58	33	21
diameter (cm)	96	193	289	385	481
diameter (ft)	3.16	6.32	9.48	12.64	15.80