


Audio/DMX + Power Hybrid Cable

Item Code: 1E00277

CVS LKAD1P1

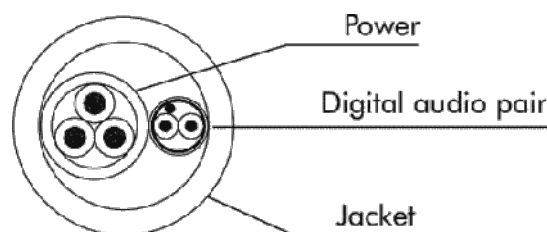

General Data	
Application	Installation/Mobile
Cable O.D. (mm)	14.9
Signal Type	Digital
Standard Reels (m)	200
Reel Material	Wooden
General Data - Audio	
Pairs	1
Mechanical Data	
Bending Radius (xO.D.)	10
Min Operating Temperature (°C)	-15
Max Operating Temperature (°C)	80
Weight (Kg/100m)	25.50
Conductor - Audio	
Area (mm ²)	0.22
AWG	24
Material	Tinned copper
Insulation - Audio	
Material	Foam-Polyolefine
Shield - Audio	
Material	Tinned copper
Coverage	100%
Shield Type	Spiral
Drain Wire Material	Tinned copper
Jacket - Audio	
Cable O.D. (mm)	3.9
Conductor - Power	
Quantity	3
Area (mm ²)	1.51
AWG	16
Material	Bare copper

Insulation - Power	
Material	PVC Compound
Jacket - Power	
Cable O.D. (mm)	7.7
Jacket	
Color	Black
Material	PVC Compound
Electrical Data - Audio	
Max Conductor DCR (ohm/km)	94.2
Rated Voltage (Vac)	30
Test Voltage (Vac)	500
Electrical Data - Power	
Test Voltage (Vdc)	2000
Max Conductor DCR (ohm/km)	13.7
Rated Voltage (Vac)	600
Standards and Compliance	
CE	Yes
Standard reference	EN 50363 IEC 60228