


## 4.00 mm<sup>2</sup> Speaker Cable with Flame Resistant Jacket

Item Code: 1E00204

CVS LK02N40

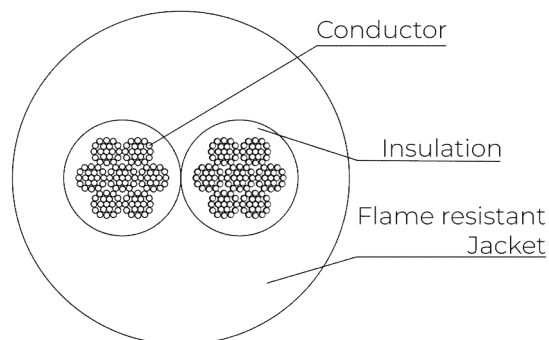

### General Data

|                    |              |
|--------------------|--------------|
| Application        | Mobile       |
| Cable O.D. (mm)    | 11.5         |
| Signal Type        | Analog Audio |
| Standard Reels (m) | 100          |
| Reel Material      | Cardboard    |

### Mechanical Data

|                                |       |
|--------------------------------|-------|
| Bending Radius (xO.D.)         | 10    |
| Min Operating Temperature (°C) | -20   |
| Max Operating Temperature (°C) | 70    |
| Weight (Kg/100m)               | 20.40 |

### Conductor

|                         |                                   |
|-------------------------|-----------------------------------|
| Quantity                | 2                                 |
| Material                | Flexible electrolytic bare copper |
| Strands                 | 128                               |
| Strands O.D. (mm)       | 0.193                             |
| Area (mm <sup>2</sup> ) | 4                                 |

### Insulation

|                      |        |
|----------------------|--------|
| Material             | PVC R2 |
| Insulation O.D. (mm) | 4      |
| Thickness (mm)       | 0.7    |

### Jacket

|                        |         |
|------------------------|---------|
| Color                  | Black   |
| Material               | PVC TM2 |
| Nominal Thickness (mm) | 1.5     |

| Electrical Data            |                      |
|----------------------------|----------------------|
| Max Conductor DCR (ohm/km) | 4.95                 |
| Mutual Capacitance (pF/m)  | 110                  |
| Rated Voltage (Vac)        | 300                  |
| Test Voltage (Vac)         | 2000                 |
| Standards and Compliance   |                      |
| CE                         | Yes                  |
| Standard reference         | IEC 60332-1-2        |
|                            | IEC 60332-3-24 Cat.C |
|                            | EN 50363-3           |