

# SCENA LED 200 MZ FC



The powerful  
Theatre projector  
with motorized zoom  
and color mixing

HIGH-POWER RGBW LED

ADJUSTABLE COLOR TEMPERATURE  
(2700 K - 8000 K)

14° - 60° MOTORIZED LINEAR ZOOM

FLICKER FREE PROJECTION

LONG LIFE LED (50,000 HOURS)

NOISELESS OPERATION

DMX / RDM AND MANUAL CONTROL

LOW POWER CONSUMPTION



SCENA LED 200 MZ FC is a high power LED projector in a very compact and lightweight size.

SCENA LED 200 MZ FC is equipped with a high efficiency 200 W RGBW LED source, coupled with a 14° - 60° motorized linear zoom. This layout makes the unit particularly suitable for theatres, TV studios, exhibitions, events and any application requiring an endless palette of colors and a DMX / RDM remote management of zoom, dimming and shutter functions.



# SCENA LED 200 MZ FC



## OUTPUT

200 W RGBW LED  
LED lifespan: 50,000 hours (70% lumen output)

## OPTICAL GROUP

Ø 150 mm Fresnel lens  
14° - 60° motorized linear zoom

## COLOR GENERATION

16 LEE Filters Macros  
Linear color temperature (2700K - 8000K)

## INTERFACE / CONTROL / PROGRAMMING

DMX 512 / RDM or manual control  
12 DMX channels (default)  
4-digit 7-segment LED display + 4 soft keys  
Internal operating system updatable via DTS Dongle  
Firmware Uploader

## POWER SUPPLY

Electronic full-range 100-240 Vac 50 / 60 Hz  
Power consumption: 200 W max

## CONNECTIONS

Power supply: PowerCON TRUE1 In / Out  
panel connectors;  
DMX: XLR 5-pole In / Out panel connectors

## INTERNAL SAFETY DEVICES

Overvoltage and overtemperature circuit protection

## OPERATING AMBIENT TEMPERATURE

-10° / 40°

## PHYSICAL


IP20  
Dimensions: 276.5x451x357 h mm  
Weight: 8.7 Kg  
Finishing: black

## INTERNATIONAL CERTIFICATIONS

CE certification

## INCLUDED ITEMS

1 x PowerCON TRUE1 female cable connector (code 0520P066)  
1 x XLR 5 pins female cable connector (code 0508B147)  
1 x XLR 5 pins male cable connector (code 0508B148)  
1 x Filterframe Black finishing - already installed on the projector (code 02M093278.46)

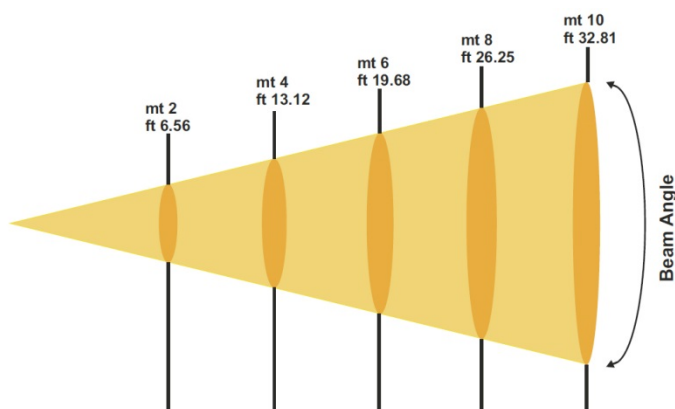

Beam Angle

Beam Angle 14° @ 50%

Beam Angle 60° @ 10%

Lux center [lx]	15744	3936	1749	984	630
Foot candles [fc]	1463	366	163	91	59
Diameter [cm]	49	98	147	196	246
Diameter [ft]	1.61	3.22	4.83	6.45	8.06

Lux center [lx]	4081	1020	453	255	163
Foot candles [fc]	379	95	42	24	15
Diameter [cm]	231	462	693	924	1155
Diameter [ft]	7.58	15.15	22.73	30.31	37.88