

EOS 6 FC



Robust and versatile; perfect for temporary or fixed installations

6 x OSTAR RGBW LEDs
HIGH QUALITY RGBW COLOR MIXING
IP65 WATER PROOF LIGHT BODY
ROBUST AND VERSATILE
PRODUCT CUSTOMIZABLE FOR VARIOUS APPLICATIONS
EXTERNAL PSU (DRIVENET)



EOS 6 FC is an ultra-compact and robust IP 65 Wash light fitted with high power LEDs. EOS 6 FC is ideal for rental companies, architectural applications, and outdoor temporary or fixed installations.

The unit is fitted with an adjustable bracket or with a round flange for recessed installation (EOS 6 R FC).

The unit is available with different beam angles that enlarge its projections range. EOS 6 FC must be powered by an external PSU: DRIVENET 416, 832 or 1664.



EOS 6 FC



OUTPUT

6 x RGBW LEDs
3,320 Lumens@700mA
LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

3 lenses sets available:
10° / 22° / 40°

INTERFACE / CONTROL / PROGRAMMING

DMX 512, RDM and ArtNet (via Drivenet series)

POWER SUPPLY

External PSU:
DRIVENET 416 / 832 PSU (Full-range 100-240Vac 50-60 Hz)
DRIVENET 1664 (range 180-240Vac 50-60 Hz)
Power consumption: 60 W max

CONNECTIONS

Cable with M12 male connector (1 m)


OPERATING AMBIENT TEMPERATURE

-10° / 40°

PHYSICAL

IP65
IK protection degree: IK09 (only R version)
Housing: Aluminium
Weight: 3.9 Kg
Dimensions:
167 x 75 x 176 h mm (EOS 6 FC)
200 x 75 x 200 h mm (EOS 6 R FC)

LEDs current 700mA

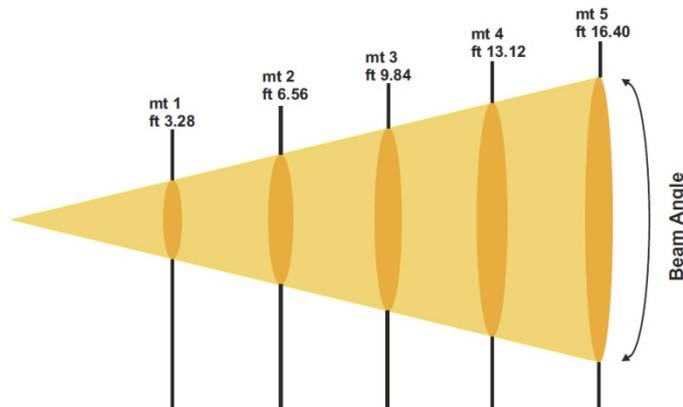

Lux center [lx]	29578	7395	3286	1849	1183
Foot candles [fc]	2749	687	305	172	110
Diameter [cm]	17	35	52	70	87
Diameter [ft]	0.57	1.15	1.72	2.30	2.87
Lux center [lx]	7455	1864	828	466	298
Foot candles [fc]	693	173	77	43	28
Diameter [cm]	39	78	117	156	194
Diameter [ft]	1.28	2.55	3.83	5.10	6.38
Lux center [lx]	5020	1255	558	314	201
Foot candles [fc]	467	117	52	29	19
Diameter [cm]	73	146	218	291	364
Diameter [ft]	2.39	4.78	7.16	9.55	11.94

Beam Angle 10°

Beam Angle 22°

Beam Angle 40°