

MSD Platinum (Touring/Stage)

MSD Platinum 16 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Product data

General Information		Operating and Electrical	
Cap-Base	- [-]	Power (Rated) (Nom)	330 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Controls and Dimming	
Main Application	Stage/Touring	Dimmable	Yes
Life To 50% Failures (Nom)	1500 h	Mechanical and Housing	
System Description	Reflector E21.9 TCM	Cap-Base Information	-
Light Technical		Luminaire Design Requirements	
Color Code	2	Bulb Temperature (Max)	900 °C
Luminous Flux (Min)	14300 lm	Pinch Temperature (Max)	350 °C
Luminous Flux (Nom)	16000 lm	Product Data	
Chromaticity Coordinate X (Nom)	299	Full product code	871829170438600
Chromaticity Coordinate Y (Nom)	303	Order product name	MSD Platinum 16 R 1CT/8
Correlated Color Temperature (Nom)	8000 K		
Color Rendering Index (Nom)	-		

MSD Platinum (Touring/Stage)


EAN/UPC - Product	8718291704386
Order code	928195205314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8

Material Nr. (12NC)	928195205314
Net Weight (Piece)	0.080 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSD Platinum 16 R

Product	D (max)	O	C (max)
MSD Platinum 16 R 1CT/8	58.5 mm	1.3 mm	66.4 mm

Photometric data

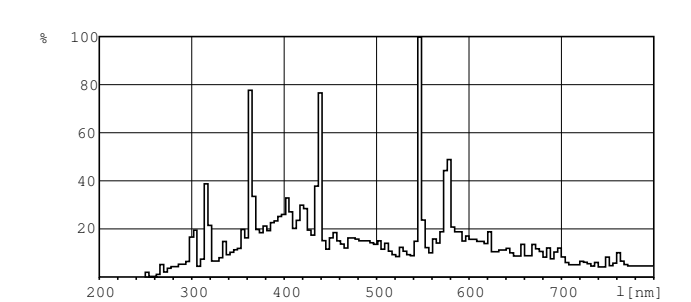

MSD

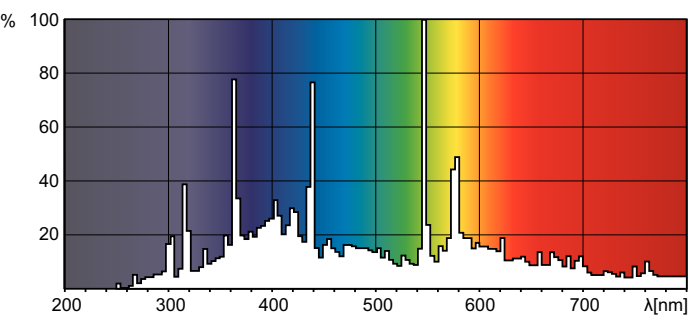

MSD

