
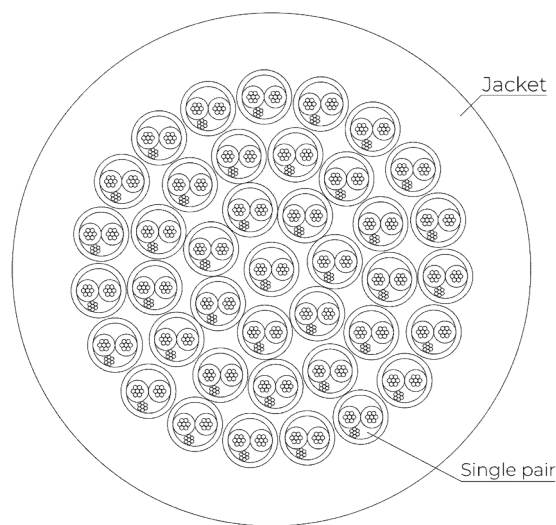


40-Pair Audio Cable with Aluminum Shield

Item Code: 1E00443

CVS LKSSA40C

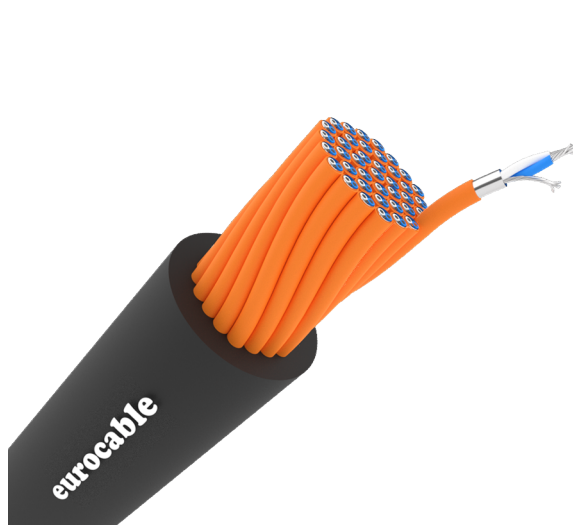

General Data

Cable O.D. (mm)	24.5
Signal Type	Analog Audio

General Data - Audio

Pairs	40
-------	----

Mechanical Data

Max Operating Temperature (°C)	70
Min Operating Temperature (°C)	-30
Weight (Kg/100m)	83.60
Bending Radius (xO.D.)	10

Conductor

Inner Sheat	PVC Compound
Material	Tinned copper
Strands O.D. (mm)	0.2

Insulation

Material	Cross-linked Polyolefin
----------	-------------------------

Jacket - Audio

Cable O.D. (mm)	2.7
-----------------	-----

Conductor - Data

Strands	7
---------	---

Shield

Material	Aluminum - Polyester tape + drain wire
Coverage	100%

Jacket

Material	PVC Compound
Color	Black

Electrical Data	
Conductor/Conductor Capacitance (pF/m)	140
Conductor/Shield Capacitance (pF/m)	250
Nominal Impedance (ohm/100m)	440
Max Inductance (μH/100m)	80
Max Conductor DCR (ohm/km)	94.2
Attenuation @ 1 KHz (dB/100m)	0.24
Rated Voltage (Vac)	30
Test Voltage (Vac)	500