



# MSR Gold™ SA Double Ended

## MSR Gold™ 700 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Product data


General Information		Operating and Electrical	
Cap-Base	SFC10-4 [ SFC10-4]	Power (Rated) (Nom)	700 W
Operating Position	UNIVERSAL [ Any or Universal (U)]	Lamp Current (Nom)	11.5 A
Main Application	Studio/Disco	Ignition Supply Voltage (Min)	198 V
Life To 50% Failures (Nom)	750 h	Controls and Dimming	
System Description	SA/2 DE	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	- [ Not Specified]	Cap-Base Information	SFC10-4
Luminous Flux (Min)	47000 lm	Luminaire Design Requirements	
Luminous Flux (Nom)	56000 lm	Pinch Temperature (Max)	500 °C
Chromaticity Coordinate X (Nom)	299	Product Data	
Chromaticity Coordinate Y (Nom)	320	Full product code	871829122123400
Correlated Color Temperature (Nom)	7500 K	Order product name	MSR Gold™ 700 SA/2 DE 1CT/4
Luminous Efficacy (rated) (Nom)	80 lm/W		
Color Rendering Index (Nom)	75		

MSR Gold™ SA Double Ended

EAN/UPC - Product	8718291221234
Order code	928174705115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

Material Nr. (12NC)	928174705115
Net Weight (Piece)	34.000 g

Dimensional drawing

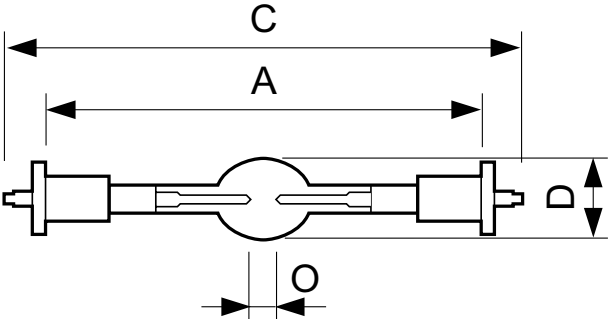

MSR GOLD 700 SA/2 DE

Product	D	O	A	A	A	C
---------	---	---	---	---	---	---

