



MSR Gold™ SA Double Ended

MSR Gold™ 1200 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.


Product data

General Information		Operating and Electrical	
Cap-Base	SFC10-4 [SFC10-4]	Power (Rated) (Nom)	1200 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Lamp Current (Nom)	13.6 A
Main Application	Entertainment	Ignition Supply Voltage (Min)	198 V
Life To 50% Failures (Nom)	750 h	Controls and Dimming	
System Description	SA/2 DE	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	- [Not Specified]	Cap-Base Information	SFC10-4
Luminous Flux (Min)	99000 lm	Product Data	
Luminous Flux (Nom)	103000 lm	Full product code	871829122107400
Chromaticity Coordinate X (Nom)	301	Order product name	MSR Gold™ 1200 SA/2 DE 1CT/4
Chromaticity Coordinate Y (Nom)	316	EAN/UPC - Product	8718291221074
Correlated Color Temperature (Nom)	7500 K	Order code	928175305115
Luminous Efficacy (rated) (Nom)	86 lm/W	Numerator - Quantity Per Pack	1
Color Rendering Index (Nom)	85		

MSR Gold™ SA Double Ended

Numerator - Packs per outer box	4
Material Nr. (12NC)	928175305115
Net Weight (Piece)	34.000 g

Dimensional drawing

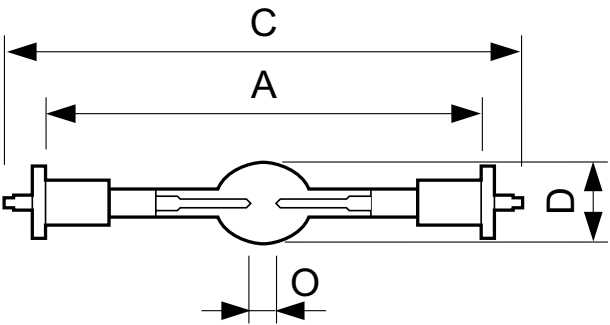

MSR GOLD 1200 SA/2 DE

Product	D	O	A	A	A	C
---------	---	---	---	---	---	---

