

FOCUS FC



Ideal for
highlighting objects
with a color accent
projection

3 x OSTAR RGBW HIGH-POWER LED
HIGH QUALITY RGBW
COLOR MIXING
IP65 WATER PROOF
COMPACT AND VERSATILE
PRODUCT CUSTOMIZABLE
FOR VARIOUS APPLICATIONS
CHOICE OF DIFFERENT
LENSES AVAILABLE



FOCUS FC is a very compact IP65 LED projector available either with an orientable bracket or with a recessed flange (FOCUS R FC). The unit is fitted with 3 high power RGBW LEDs. The unit is suitable for shopping centers, restaurants, museums, clubs and any application where high quality color mixing and great compactness are required. FOCUS FC must be powered by an external PSU: DRIVENET 416, 832, or 1664.



FOCUS FC



OUTPUT

3 x RGBW LEDs
 Lumens: 1,288@700mA
 LED lifespan: 50,000 hours
 (70% lumen output)

OPTICAL GROUP

2 lenses sets available:
 22° / 28°

INTERFACE / CONTROL / PROGRAMMING

DMX 512, RDM and ArtNet (via Drivenet series)

POWER SUPPLY

External PSU:
 DRIVENET 416 / 832 PSU (Full-range 100-240Vac 50-60 Hz)
 DRIVENET 1664 (range 180-240Vac 50-60 Hz)
 Power consumption: 30 W max

CONNECTIONS

End-stripped 8-pole cable (1 m)


OPERATING AMBIENT TEMPERATURE

-10° / 40°

PHYSICAL

IP65
 IK protection degree: IK09 (only R version)
 Housing: Aluminium
 Weight:
 0.8 Kg (FOCUS FC)
 1 Kg (FOCUS R FC)
 Dimensions:
 95 x 89 x 105 h mm (FOCUS FC)
 125 x 78 x 125 h mm (FOCUS R FC)

LEDs current 700mA

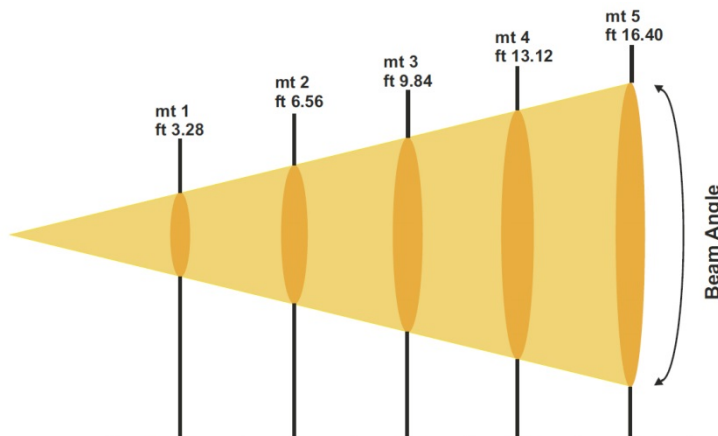

Lux center [lx]	5253	1313	584	328	210
Foot candles [fc]	488	122	54	31	20
Diameter [cm]	39	78	117	156	194
Diameter [ft]	1.28	2.55	3.83	5.10	6.38
Lux center [lx]	3567	892	396	223	143
Foot candles [fc]	332	83	37	21	13
Diameter [cm]	50	100	150	199	249
Diameter [ft]	1.64	3.27	4.91	6.54	8.18

Beam Angle 22°

Beam Angle 28°