


2.50 mm² Speaker Cable with Flame Resistant Jacket

Item Code: 1E00193

CVS LK02N25

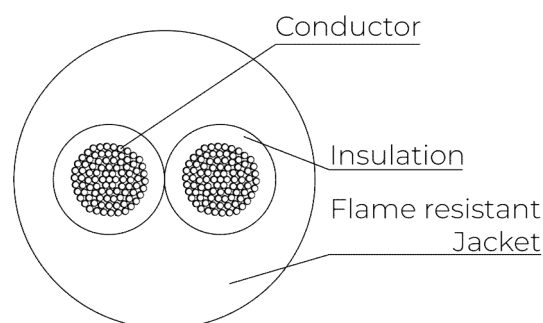

General Data

Application	Mobile
Cable O.D. (mm)	9.2
Signal Type	Analog Audio
Standard Reels (m)	100
Reel Material	Cardboard

Mechanical Data

Bending Radius (xO.D.)	10
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	20.40

Conductor

Quantity	2
Material	Flexible electrolytic bare copper
Strands	128
Strands O.D. (mm)	0.193
Area (mm ²)	2.5

Insulation

Material	PVC R2
Insulation O.D. (mm)	4
Thickness (mm)	0.7

Jacket

Color	Black
Material	PVC TM2
Nominal Thickness (mm)	1.2

Electrical Data	
Max Conductor DCR (ohm/km)	4.95
Mutual Capacitance (pF/m)	110
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Standards and Compliance	
CE	Yes
Standard reference	IEC 60332-1-2
	IEC 60332-3-24 Cat.C
	EN 50363-3