

BRICK



The base of any Lighting Design

24 x OSRAM OSTAR STAGE N RGBW LEDs

HIGH-QUALITY COLOR MIXING

QUICKLY INTERCHANGEABLE BEAM
ANGLES

IP65 RATED

DESIGNED FOR BOTH TEMPORARY AND
PERMANENT INSTALLATIONS

BUILT-IN FULL-RANGE PSU

VERY COMPACT AND LIGHTWEIGHT

THE BEST VALUE FOR MONEY



The new BRICK is a high power, very compact, self-contained, IP65 LED Wash light.

BRICK is suitable for various purposes, offering a range of projection angles quickly interchangeable (no tools required).

BRICK comes with an IP65 power cable plus 2 DMX cables with M / F XLR connectors (all IP65), that make it perfect for temporary lighting applications, but also for safe long-lasting installations.

Built with top quality components, BRICK gives you the best value for money by efficient design and full production automation.



BRICK



| LED TECHNOLOGY |

24 x Osram Ostar Stage N
RGBW LEDs

| OPTICAL GROUP |

8° projection angle
Range of quick-mounting
holographic filters included:
20° / 40° / 60x10°
(no mounting tools required)
Uniform projection on surfaces

| COLOR GENERATION |

16 million colors
Wide palette of pure uniform
whites with variable linear color
temperature (2700 K – 8000 K)

| INTERFACE / CONTROL / PROGRAMMING |

4-digit 7-segment LED display
+ 4 soft keys:
control/management/monitoring
of the main parameters
Controlled via DMX 512
and RDM standard digital
communication protocols
Internal operating system
updatable via DTS RED BOX
interface

| DMX |

10 DMX channels

| POWER SUPPLY |

Built-in full-range PSU
100-240 Vac 50/60 Hz
Power consumption:
400 VA max

| CONNECTIONS |

Power supply: 3 x 1 sq mm
cable (1. 5 m length)
DMX In/Out: 0.7 m cable
with XLR 5 pins IP65
connector

| OPERATING AMBIENT TEMPERATURE |

-10° / 40°

| PHYSICAL |


IP65
IK protection degree: IK09
Weight: 10 Kg
Dimensions: 439 x 160 x 262 h
mm

| INTERNATIONAL CERTIFICATIONS |

CE Certification

| INCLUDED ITEMS |

1 x Holographic filter 20° (code
0506A043.D11)
1 x Holographic filter 40° (code
0506A045.D11)
1 x Holographic filter 60°x10° (code
0506A092.D11)
1 x PowerCON TRUE1 female cable
connector (code 0520P066)
1 x PowerCON TRUE1 male cable
connector (code 0520P067)
1 x Display UV protection (code
03.LA.218)
1 x Omega bracket with "Fast Lock"
– already mounted on the unit (code
02K00467)

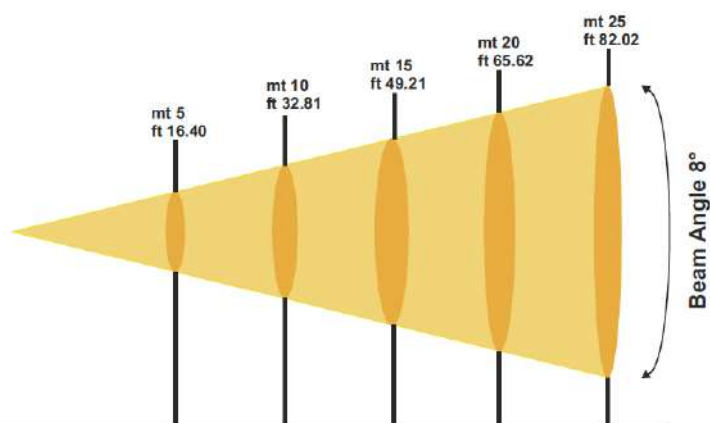

RED	Lux center [lx]	4066	1017	452	254	163
	Foot candles [fc]	378	94	42	24	15
GREEN	Lux center [lx]	6647	1662	739	415	266
	Foot candles [fc]	618	154	69	39	25
BLUE	Lux center [lx]	545	136	61	34	22
	Foot candles [fc]	51	13	6	3	2
WHITE	Lux center [lx]	9940	2485	1104	621	398
	Foot candles [fc]	924	231	103	58	37
FULL RGBW	Lux center [lx]	14277	3569	1586	892	571
	Foot candles [fc]	1327	332	147	83	53
BEAM ANGLE	Diameter [cm]	70	140	210	280	350
	Diameter [ft]	2,29	4,59	6,88	9,18	11,47