

# FREELINE 60 FC



The extra Compact  
and Stylish LED  
bar for indoor and  
outdoor  
installations

8 x OSTAR RGBW LEDs  
HIGH QUALITY COLOR MIXING  
CHOICE OF DIFFERENT  
BEAM ANGLES  
IP65 WATERPROOF LED BAR  
VERSATILE AND COMPACT  
CUSTOMIZABLE FOR  
DIFFERENT APPLICATIONS  
DMX-CONTROLLED

FREELINE 60 FC is a powerful LED bar in a very compact size. Developed with a stylish design, it is suitable for indoor or outdoor applications (IP65-rated). FREELINE 60 FC is available with different beam angles and it can be fitted with additional filters to further enlarge its projections range. The unit can be powered by DRIVENET 416, 832 or 1664 power supplies.



# FREELINE 60 FC



## OUTPUT

Light source: 8 full color LEDs (RGBW)  
3,440 Lumens @ 700 mA  
LED lifespan: 50,000 hours (70% lumen output)

## OPTICAL GROUP

3 lenses sets available:  
26°, 42°, 60°x10°

## INTERFACE / CONTROL / PROGRAMMING

Interface: DMX 512 / RDM or ArtNet (via DRIVENET series)

## POWER SUPPLY

External PSU:  
DRIVENET 416 / 832 PSU (Full-range 100-240Vac 50-60 Hz)  
DRIVENET 1664 (range 180-240Vac 50-60 Hz)  
Power consumption: 80 W max

## CONNECTORS

30 cm cable with M12 male connector


## OPERATING AMBIENT TEMPERATURE

-10° / 40°

## PHYSICAL

Weight: 1.5 Kg  
Dimensions: 602 x 51 x 65 h mm

LEDs current 700mA

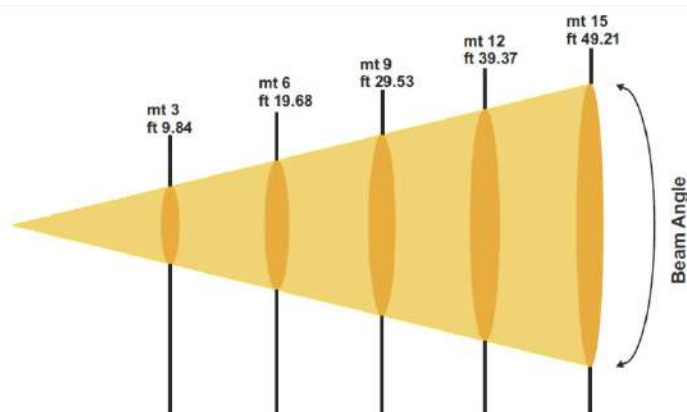

Lux center [lx]	1267	317	141	79	51
Foot candles [fc]	118	29	13	7	5
Diameter [cm]	138	276	414	552	690
Diameter [ft]	4.53	9.05	13.58	18.11	22.83
Lux center [lx]	850	213	94	53	34
Foot candles [fc]	79	20	9	5	3
Diameter [cm]	230	461	691	921	1152
Diameter [ft]	7.56	15.11	22.67	30.23	37.78
Lux center [lx]	1929	482	214	121	77
Foot candles [fc]	179	45	20	11	7
Diameter [cm]	346	693	1039	1386	1732
Diameter [ft]	11.37	22.73	34.10	45.46	56.83
Diameter [cm]	52	105	157	210	262
Diameter [ft]	1.72	3.44	5.17	6.89	8.61

Beam Angle 25,9°

Beam Angle 42°

Beam Angle 60°  
X-axis

Beam Angle 10°  
Y-axis