


48-Pair Audio Cable with Aluminum Shield

Item Code: 1E00444

CVS LKSSA48C

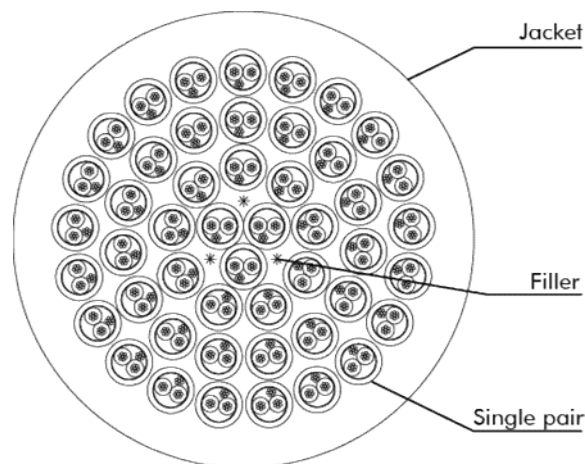

General Data	
Cable O.D. (mm)	27.3
Signal Type	Analog Audio
General Data - Audio	
Pairs	48
Mechanical Data	
Max Operating Temperature (°C)	70
Min Operating Temperature (°C)	-30
Bending Radius (xO.D.)	10
Conductor	
Inner Sheat	PVC Compound
Material	Tinned copper
Strands O.D. (mm)	0.2
Insulation	
Material	Cross-linked Polyolefin
Jacket - Audio	
Cable O.D. (mm)	2.7
Conductor - Data	
Strands	7
Shield	
Material	Aluminum - Polyester tape + drain wire
Coverage	100%
Jacket	
Material	PVC Compound
Color	Black

Electrical Data	
Conductor/Conductor Capacitance (pF/m)	140
Conductor/Shield Capacitance (pF/m)	250
Nominal Impedance (ohm/100m)	440
Max Inductance (μH/100m)	80
Max Conductor DCR (ohm/km)	94.2
Attenuation @ 1 KHz (dB/100m)	0.24
Rated Voltage (Vac)	30
Test Voltage (Vac)	500