
Made in Italy



SUPERPANEL SOFTFULL COLOR 60

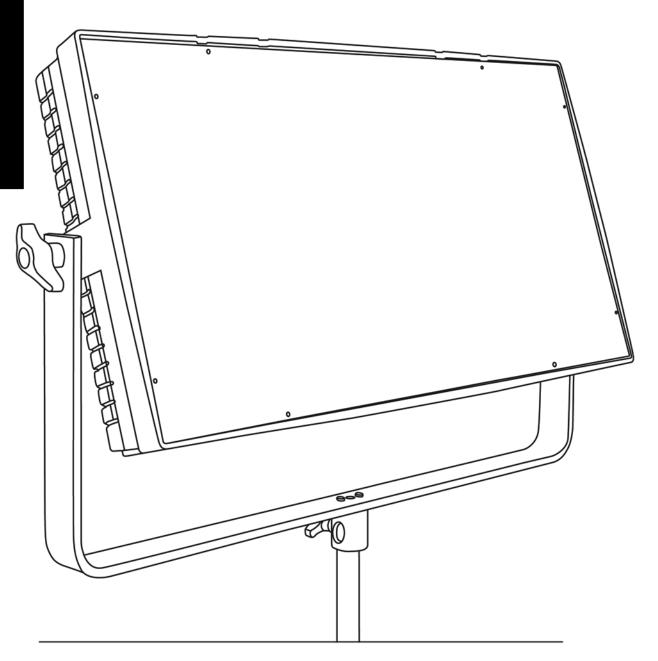

Technical features

Dimensions	65 cm x 34 cm x 11 cm	
Weight	9 kg	
CRI (Colour Rendering Index)	> 95, typical 96	
Dimmer 0 – 100	included	
Dimming curves mode	Linear, Exponential, Logarithmic	
DMX module	included	
DMX (bit)	8 bit and 16 bit	
Connection for 2 x 14.8 V battery with standard XLR 4 pin connector	included	
Standard XLR 5 pin connectors for connection to DMX console	included	
Watt consumption	400 W	
Colour temperature	2800 K – 10000 K	
Voltage AC	90 V - 240 V	
Frequency (input)	50/60 Hz	
Compliance	CE	

Photometric data

Distance	5600 K	3200 K
Lux at 1 m	8500	7600
Lux at 2 m	2400	2300
Lux at 3 m	1250	1180
Lux at 4 m	790	760
Lux at 5 m	590	560



Mode options

CCT (Correlated Color Temperature)

Mode for variable color temperature control from 2700K to 10000K with the addition of plus and minus green/magenta offset.

HSI (Hue, Saturation and Intensity)

Mode for full-color control.

RGBW

Mode for control of Red, Green, Blue and White independently.

Preset

Mode for a selected variety of gels.

Special Effects

Include Strobe - Party - Copcar - Disco - Fire - Candle - Television - Lightning - Paparazzi.

Made in Italy