

MINI FOCUS FC



16-million Colors
in a very compact
and unobtrusive
package

1 x OSTAR RGBW LED
HIGH QUALITY RGBW
COLOR MIXING
IP65 WATER PROOF
COMPACT AND VERSATILE
PRODUCT CUSTOMIZABLE
FOR VARIOUS APPLICATIONS
CHOICE OF DIFFERENT
LENSES AVAILABLE



MINI FOCUS FC is a very compact IP65 LED projector available with an orientable bracket or with a recessed flange (MINI FOCUS R FC). The unit is fitted with one high power RGBW LED. The unit is suitable for shopping centers, restaurants, museums, clubs and any application where high quality color mixing and extra-compactness are required. MINIFOCUS FC must be powered by an external PSU: DRIVENET 416, 832 or 1664



MINI FOCUS FC



OUTPUT

1 x RGBW LED
Lumens: 420@700mA
LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

2 lenses sets available:
22° / 28°

INTERFACE / CONTROL / PROGRAMMING

DMX 512, RDM and ArtNet (via Drivenet series)

POWER SUPPLY

External PSU:
DRIVENET 416 / 832 PSU (Full-range 100-240Vac 50-60 Hz)
DRIVENET 1664 (range 180-240Vac 50-60 Hz)
Power consumption: 10 W max

CONNECTIONS

End-stripped 8-pole cable (1 m)


OPERATING AMBIENT TEMPERATURE

-10° / 40°

PHYSICAL

IP65
IK protection degree: IK09 (only R version)
Housing: Aluminium
Weight:
0.24 Kg (MINI FOCUS FC)
0.34 Kg (MINI FOCUS R FC)
Dimensions:
58 x 69 x 66 h mm (MINI FOCUS FC)
75 x 66 x 75 h mm (MINI FOCUS R FC)

LEDs current 700mA

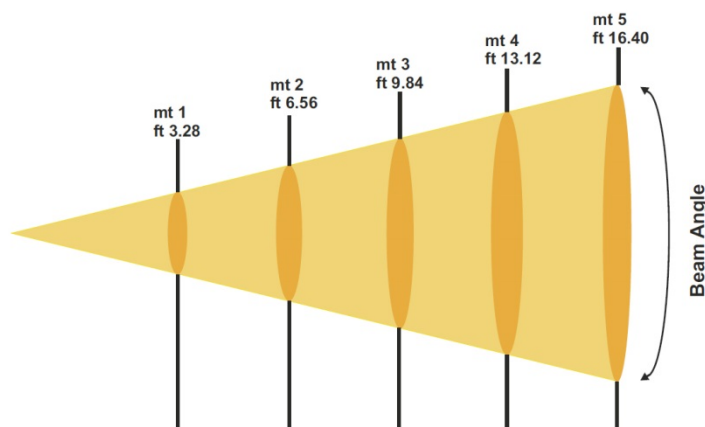

Lux center [lx]	1751	438	195	109	70
Foot candles [fc]	163	41	18	10	7
Diameter [cm]	39	78	117	156	194
Diameter [ft]	1,28	2,55	3,83	5,10	6,38
Lux center [lx]	1189	297	132	74	48
Foot candles [fc]	111	28	12	7	4
Diameter [cm]	50	100	150	199	249
Diameter [ft]	1,64	3,27	4,91	6,54	8,18

Beam Angle 22°

Beam Angle 28°