

FOCUS SOLO ZOOM FC



Extra-versatile:
the compact
LED Projector
with a long-
excursion Zoom

1 x OSTAR RGBW HIGH-POWER LED
HIGH QUALITY RGBW
COLOR MIXING
ADJUSTABLE ZOOM (3.5° - 52°)
COMPACT AND VERSATILE



FOCUS SOLO ZOOM FC is a very compact IP 20 LED projector fitted with an orientable bracket. FOCUS SOLO ZOOM FC contains one high power RGBW LED and is fitted with a long excursion manual zoom (3.5° - 52°). The unit is suitable for shopping centers, restaurants, museums, clubs, theme parks and any application where high quality color mixing, compactness and versatility are required. FOCUS SOLO ZOOM FC has a built in LED driver and is powered by any industrial 12 V - 48 V DC PSU.



FOCUS SOLO ZOOM FC



OUTPUT

1 x RGBW LED
Lumens: 429
LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

Long-excursion 3.5° - 52° manual zoom

INTERFACE / CONTROL / PROGRAMMING

DMX 512, RDM controllable
DMX address settings and functions can be also managed by the dedicated DLC 901 remote control

POWER SUPPLY

LED driver on board
External power supply: 12 V ÷ 48 V DC
Power consumption: 10 W Max

CONNECTIONS




End-stripped 4-pole cable (1 m)

OPERATING AMBIENT TEMPERATURE

-10° / 40°

PHYSICAL

IP20
Housing: Aluminium
Weight: 0.94 Kg
Dimensions:
99 x 183 x 117 h mm (Spot mode)

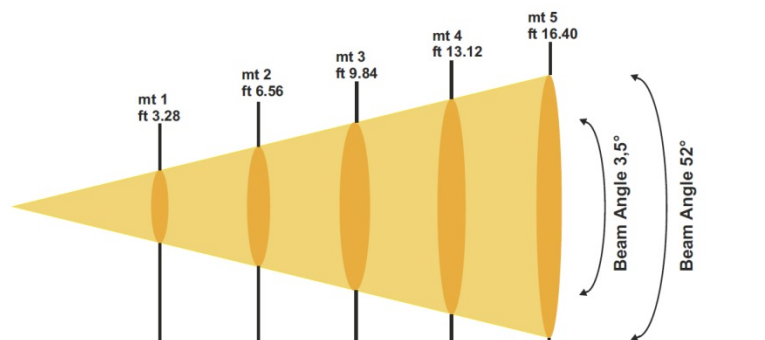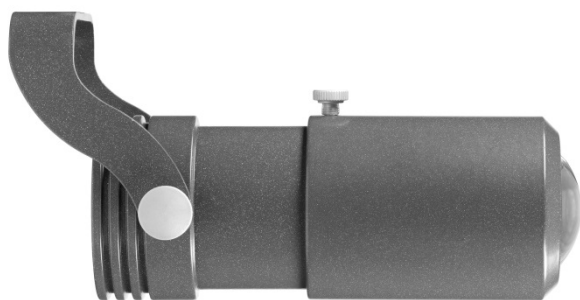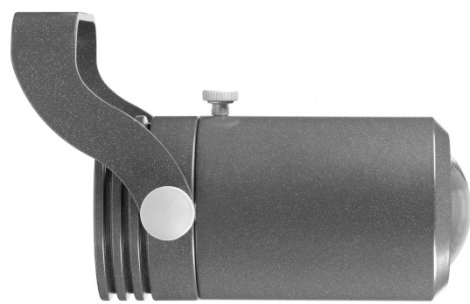

PHOTOMETRIC DATA

| | | | | | |
|-------------------|-------|------|------|------|------|
| Lux center [lx] | 18900 | 4725 | 2100 | 1181 | 756 |
| Foot candles [fc] | 1757 | 439 | 195 | 110 | 70 |
| Diameter [cm] | 6 | 12 | 18 | 24 | 31 |
| Diameter [ft] | 0,20 | 0,40 | 0,60 | 0,80 | 1,00 |

Beam Angle 3,5°

| | | | | | |
|-------------------|------|------|------|-------|-------|
| Lux center [lx] | 477 | 119 | 53 | 30 | 19 |
| Foot candles [fc] | 44 | 11 | 5 | 3 | 2 |
| Diameter [cm] | 98 | 195 | 293 | 390 | 488 |
| Diameter [ft] | 3,20 | 6,40 | 9,60 | 12,80 | 16,00 |

Beam Angle 52°