OPERATING INSTRUCTION
powerCON® TRUE1 TOP | Power IN Connector

1. CONNECTING

A

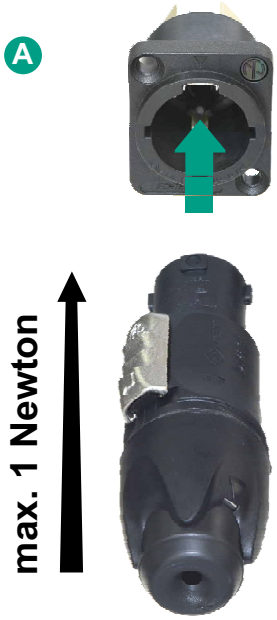

Note:
When connecting, match the notch on the cable connector to the corresponding guide slot on the chassis.

SAFETY WARNING

incorrect insertion may cause electrical contact misalignment resulting in equipment malfunction and/or personal injury.

B

C

Note:
After inserting properly as in illustration A, twist the cable connector clockwise to lock.

Note:
The proper twist-lock is achieved when the silvery tab is in the position shown in C and an audibel «click» is heard.

2. UNLOCKING

Application:
The powerCON TRUE1 TOP system is certified as a connector with breaking capacity according to IEC 60320, VDE 0625. It is intended to use as an appliance coupler and interconnection coupler. It serves to supply power to an appliance and from an appliance to other equipment. To be installed by qualified personnel only.

CONNECTOR ASSIGNMENT:

APPLIANCE INLET



APPLIANCE OUTLET

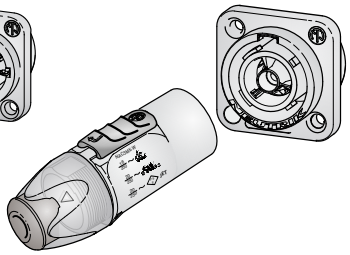

APPLIANCE INLET / OUTLET
▶ Combination

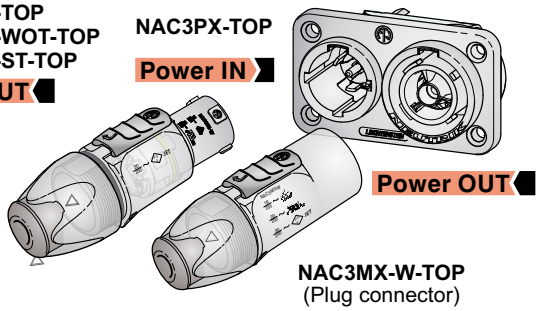

powerCON TRUE1 TOP line is full backward compatible with the preceding powerCON TRUE1 products.

Approval based:	**VDE** EN 60320-1/EN60320-2-2 ✔	**UL** UL 498 / CSA C22.2 No. 182.3 ✔
Rating:	250 V ac / 16 A	250 V ac / 20 A
Cable Type:	H05VV-F3G 1.0 mm², Length max. 2 m H05VV-F3G 1.5 - 2.5 mm² H07RN-F3G 1.5 mm²	SJTOW, SJOOW 3 x 12 AWG
Strain Relief:	White chuck	White chuck
Cable O.D.:	6.0 - 12.0 mm	6.0 - 12.0 mm

Neutrik AG	**LI**	T: +423 / 237 24 24	F: +423/232 53 93	**Neutrik France**	**FR**	T: +33 1/4131 6750	F: +33 1/4131 0511
Neutrik USA Inc.	**USA**	T: +1 704 / 972 3050	F: +1 704/438 9202	**Neutrik Tokyo Ltd.**	**JP**	T: +81 3/3663 4733	F: +81 3/3663 4796
Neutrik (UK) Ltd.	**UK**	T: +44 1983 / 811 441	F: +44 1983/811 439	**Neutrik Hong Kong Ltd.**	**HK**	T: +852/2687 6055	F: +852/2687 6052
Neutrik Vertriebs GmbH	**DE / NL / AT/DK**	T: +49 8131 / 280 890	F: +49 8131/280 830	**Neutrik India Pvt. Ltd.**	**IND**	T: +91/982 05 43 424	F: +91/22 26163 540

Draft. Nr.: BDA 557 | Update: 15.11.2018 | Data subject to change without prior notice. © 2018 NEUTRIK®. NEUTRIK® are registered trademark of NEUTRI AG. ALL RIGHTS RESERVED.